

This high resolution 1.3" C-Mount lens is compact and robust and therefore ideal for demanding imaging applications even in harsh environment. The large magnification range in combination with an excellent resolution and low distortion leads to excellent imaging results in many different imaging applications.

Key features

- Compact and robust design
- Image circle 24 mm
- Distortion < 0.08 %
- Magnification range inf. 0.5x


Applications

- Machine Vision
- AOI (Automated Optical Inspection)
- 3D and 2D measurement
- Traffic and surveillance

Technical specifications	
Type [standard]	С
ID [standard]	1101715
Interface	C-Mount
Focal length [mm]	45
F/# range	F/4 F/22
Numerical aperture [object image]	- 0.12
Max. sensor size [mm]	24
Max. angle of view [°]	29
Rec. magnification range	-0.5 O
Rec. working distance range [mm]	120 ∞
Min. working distance without extension tubes [mm]	270
Filter thread [mm]	M30.5 x 0.5
Storage temperature [°C]	-25 +70
Net. weight [standard] [g]	78
Additional info	-
f'eff [mm]	46.78
SF [mm]	-33.43
S'F' [mm]	35.85
HH' [mm]	-1.79
В'Р	1.02
SEP [mm]	12.26
S'AP [mm]	-12.06
Σd [mm]	22.50




MTF charts						
Spectrum name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Rel. weights [%]	8	16	23	22	19	13

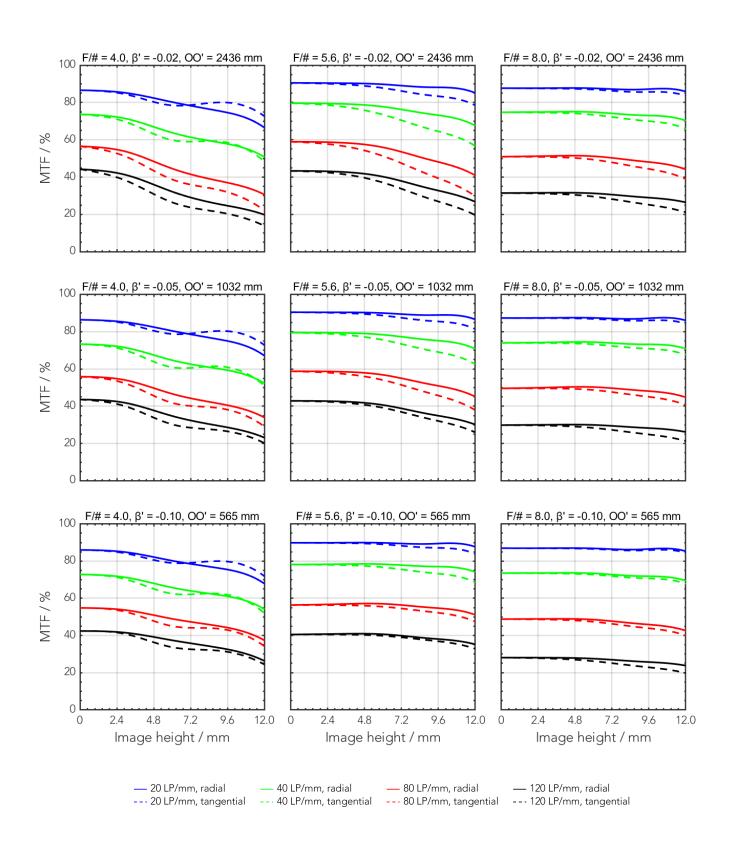



Rel. illumination vs. image height



```
- F/# = 4.0, \beta = -0.02

- F/# = 5.6, \beta = -0.02

- F/# = 8.0, \beta = -0.05

- F/# = 4.0, \beta = -0.05


- F/# = 5.6, \beta = -0.05

- F/# = 8.0, \beta = -0.10

..... F/# = 5.6, \beta = -0.10


..... F/# = 8.0, \beta = -0.10
```

Distortion vs. image height






Transmittance vs. wavelength





Technical drawings

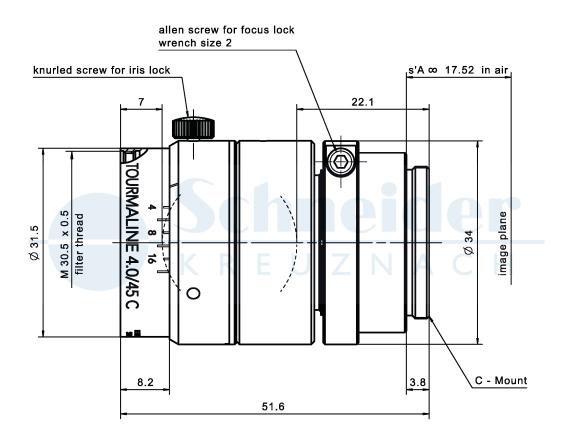



Accessories	Mount	Eff. length	ID
Adapter	CS-Mount	5 mm	25081
	C-Mount / M42 x 1	5.5 mm	1075817
Extension tube	C-Mount / C-Mount	5 mm	39316
	C-Mount / C-Mount	8 mm	39315
	C-Mount / C-Mount	10 mm	39312



Annotation		
Focal length	Nominal focal length	
F/# range	Image space F-number range for infinity focus position	
Numerical aperture	Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification)	
Max. sensor size	Image circle diameter	
Max. angle of view	Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification)	
Rec. magnification range	Magnification range as recommended by Schneider-Kreuznach	
Rec. working distance range	Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range	
Max. mechanical focus travel	Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification)	
Net weight	weight of unpacked lens without lens cap	
f'eff	Effective focal length	
SF	Distance between vertex of first lens surface and object space focal point	
S'F'	Distance between vertex of last lens surface and image space focal point (back focal distance at infinity)	
HH'	Distance between principal planes	
β'P	Pupil magnification (= exit pupil diameter / entrance pupil diameter)	
SEP	Distance between vertex of first lens surface and entrance pupil	
S'AP	Distance between vertex of last lens surface and exit pupil	
Σd	Distance between vertices of first and last lens surface	
s'A	Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification)	
ß'	Magnification (= image size / object size), negative value because image is inverted	
00'	Distance between object and image	

Unless otherwise stated all dimensions in this data sheet are in mm.